


NHS 660-U (with Uni-directional element)

NHS 660-O (with Omni-directional element)

◆ *Easy Attached, Easy Adjusted*

◆ *Feather Weight*

★ *Special design for easy attach to ear and adjustment of microphone*

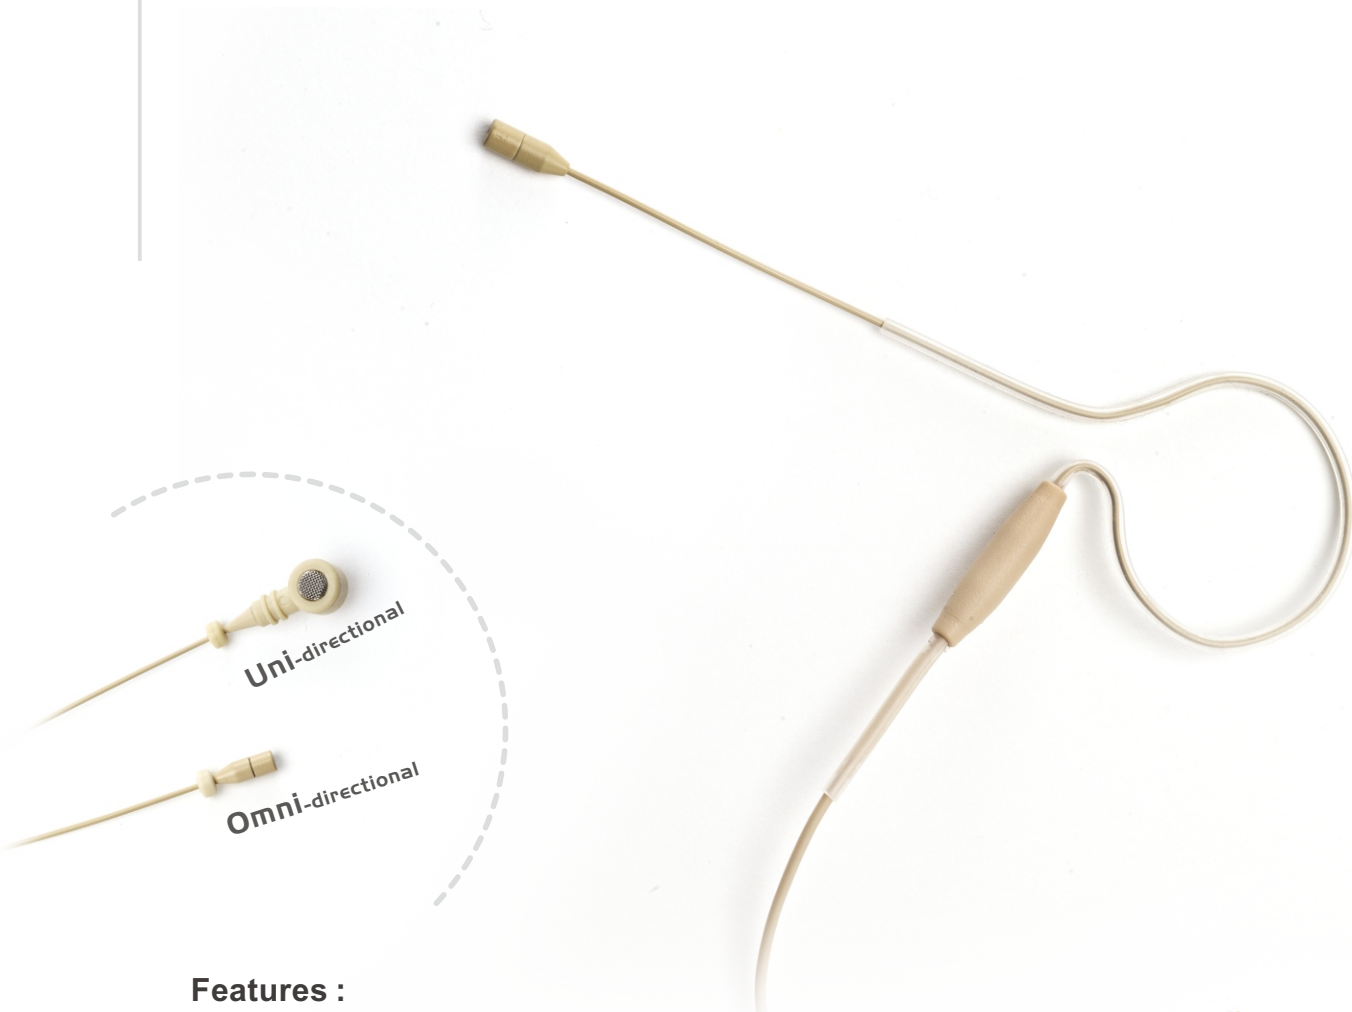

Features :


- Spectacular quality, perfect ambient noise control.
- Innovative design. Compact, lightweight.
- Multi-purpose. ideal for lecturers, traders, singing with dance, aerobics instructors, djs, performers, etc.

SPECIFICATIONS

Model No.	NHS 660-U	NHS 660-O
Polar Pattern	Uni-directional	Omni-directional
Frequency Response	70 Hz to 16,000 Hz	20 Hz to 20,000 Hz
Impedance	1,400Ω±30% (at 1K Hz)	1,500Ω±30% (at 1K Hz)
Sensitivity	- 67 dB±3 dB (0 dB=1V / microbar)	- 66 dB±3 dB (0 dB=1V / microbar)
Operating Voltage	1V~10V DC (RL : 2K2Ω)	

DIMENSIONS :

Capsule Housing	Ø9X9 mm	Ø4X11 mm
Boom	Ø1X86 mm	
Wire	Ø1.5X1.3M	

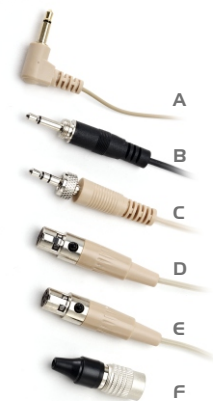

D= TA3F
E= TA4F